




IGNITE THE POWER OF NATURE

Polycrystalline PV Module

RD150P2

36 Cells 17.46% Cells Efficiency

1500VDC Maximum system voltage

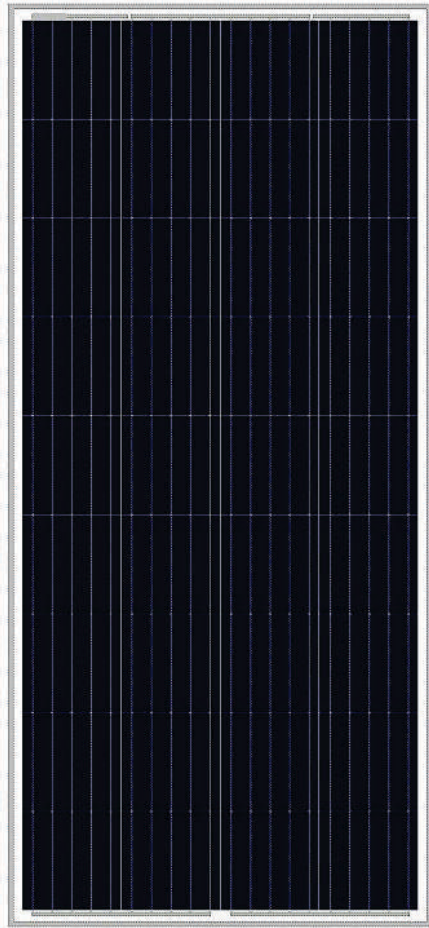

Benefits

- High efficiency solar cells with high transmission and textured glass are delivering high efficiency for modules;
- Bypass diode minimizes the power drop caused by shade;
- Tempered glass, EVA resin, and weatherproof film, plus aluminum frame for extended outdoor use;
- Modules independently tested to ensure conformance with certification and regulatory standards;
- Manufacturing facility certified to ISO 9001/ISO 14001 quality management system standards.

KEY FEATURES

OUTPUT POSITIVE TOLERANCE:

Guaranteed 0~+5W positive tolerance ensures power output reliability.

PASSED HAIL TEST:

Certified to hail resistance: ice ball size (d=45mm) and ice ball velocity(v=23.m/s).

PID RESISTANCE:

Excellent PID resistance at (-40°C~+85°C) test, and also can be improved to meet higher standards for the particularly harsh environment.

EXCELLENT MECHANICAL LOAD CAPABILITY:

Certified to withstand: snow load (5400 Pa) and wind load (2400 Pa).

WARRANTIES :

10 year limited product warranty; 25 year limited power output warranty,Power attenuation less than 20% in 20 years ,Please refer to our Warranty Terms and Conditions.

COMPREHENSIVE CERTIFICATES






IGNITE THE POWER OF NATURE

Polycrystalline PV Module

MODULE DIMENSION DETAILS

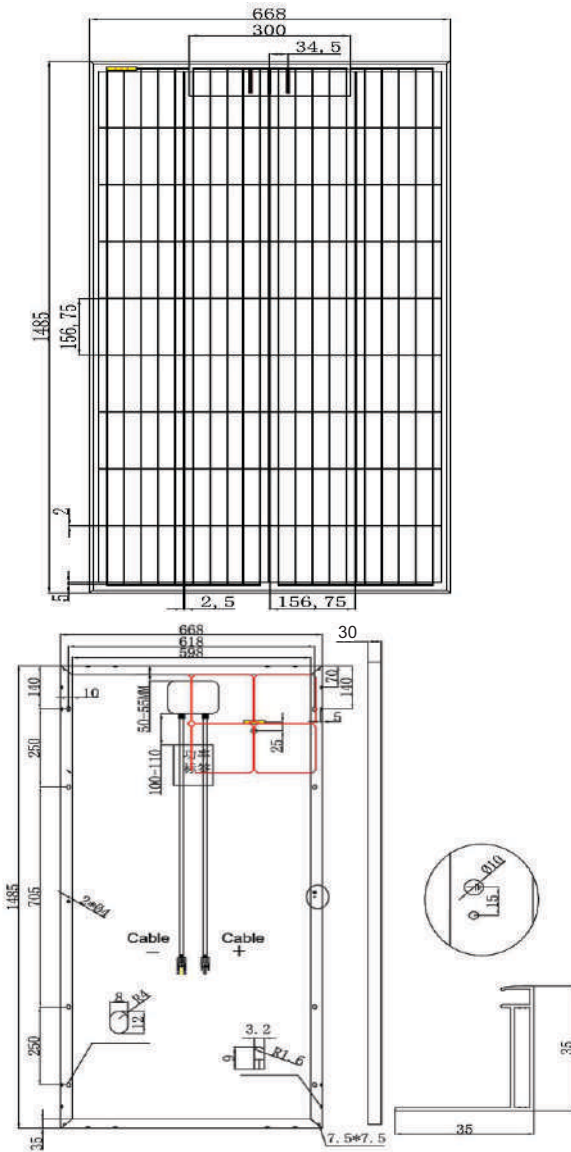


ELECTRICAL SPECIFICATIONS

AT STC(AM1.5,Temp 25°C,E 1000W/m ²)		
Module Type	150W	
Power output	P _{max}	150W
Production Tolerance	ΔP _{max}	0~+3%
Module efficiency	m	15.12%
Voltage at P _{max}	V _{mp}	18.38V
Current at P _{max}	I _{mp}	8.16A
Open circuit voltage	V _{oc}	22.33V
Short circuit current	I _{sc}	8.42A

Mechanical Data

Module Demision (mm)	1485×668×30
Cells Type	156.75*156.75mm 36 (4×9)
Weight (kg)	11.6
Glass	High transmission glass 3.2mm
Front Material	Anodized aluminium alloy
Junction box IP rating	IP67 1500VDC
Frame(Material Corners,etc.)	35*35#
Bypass Diode Rating(A)	12
Fire performance	Class C
Certifications	IEC 61215, IEC 61730

I-V Curves

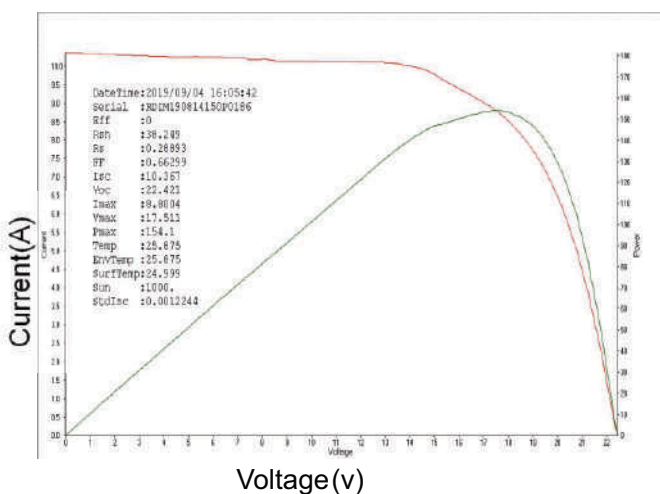

Working Conditions & Temperature

Temperature coefficient (P _{mp})	-0.39%/°C
Temperature coefficient (I _{sc})	+0.05%/°C
Temperature coefficient (V _{oc})	-0.29%/°C
NOCT	45°C±2°C
Maximum system voltage (IEC)	1500V DC
Maximum series fuse rating	10A

Packing

packing unit	Wooden box
40HQ	50pcs/Pallets